


HARO Sports Floors

Dominating the game.

HELSINKI 10 TOP 3

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities
ideal for renovations and refurbishments

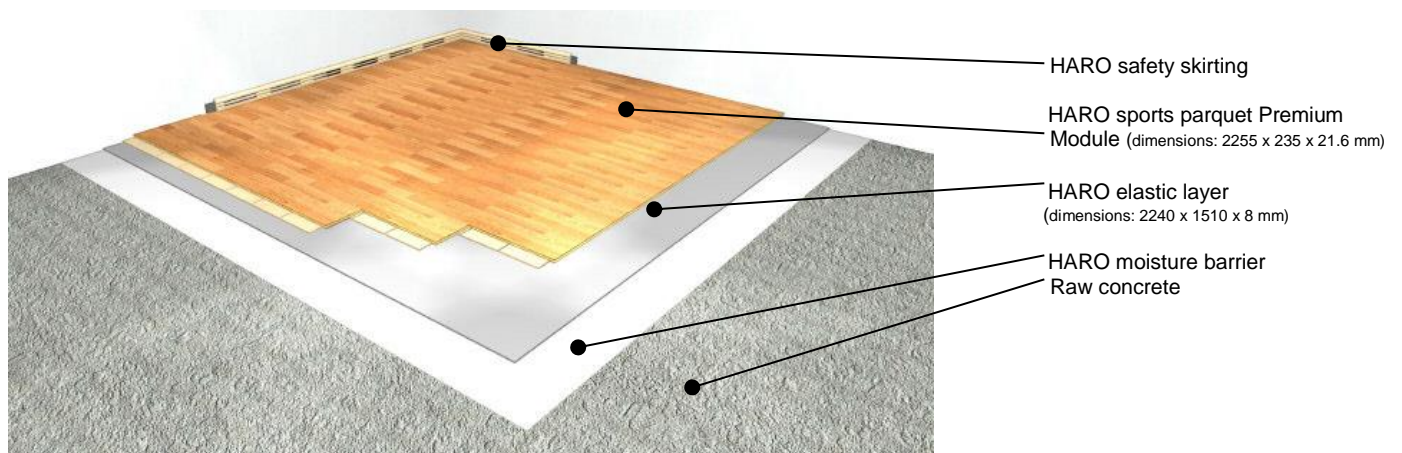

- HARO safety skirting
- HARO sports parquet Premium Module (dimensions: 2255 x 235 x 21.6 mm)
- HARO elastic layer (dimensions: 2240 x 1510 x 8 mm)
- HARO moisture barrier
- Raw concrete

Installation on an even sub-floor or concrete according to DIN 18202: 1997-04 chart 3, line 4

Model Helsinki 10 Top 3

HARO Sports Parquet Premium Module is an engineered hardwood floor, longitudinal connection via Lock Connect, head connection via Top Connect. Prefinished with 9 mm plywood BFU 100 load distribution panels

Solid wood top layer 3.6 mm

Factory finished with a highly wear resistant PERMADUR® sealing

21.6 mm

HARO elastic layer, joints offset, laid out loosely

8 mm

Construction height

29.6 mm

Model Helsinki 10 Top 3 meets and exceeds the EN 14904, FIBA rules 2010, DIN V 18032-2; April 2001 and is subject to the annual quality control RAL GZ 942.

